



JS 型蛇形弹簧联轴器

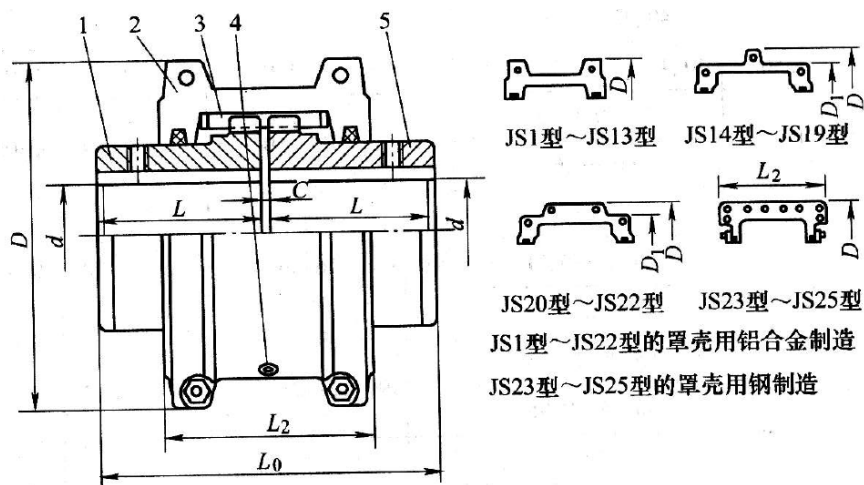

1、5—半联轴器 2—罩壳 3—蛇形弹簧 4—润滑孔

型 号	公称 转矩 T_n /N.m	许用转 速 $[n]$ /(r/min)	轴孔直径 d_1, d_2	L	L_0	L_2	D	D_1	间隙 t	质量 m /kg	转动惯量 I /kg.m ²	润滑油 /kg
JS1	45	4500	18,19	47	97	66	95	—	3	1.91	0.00141	0.0272
	20,22,24											
	25,28											
JS2	140		22,24	47	97	68	105			2.59	0.00223	0.0408
			25,28									
			30,32,35									
JS3	224		25,28	50	103	70	115			3.36	0.00327	0.0544
			30,32,35,38									
			40,42									
JS4	400	32,35,38	60	123	81	130	5.44		0.00727	0.068		
		40,42,45,48,50										
JS5	630	4350	40,42,45,48,50,55,56	63	129	94	150	7.26	0.0119	0.0862		
JS6	900	4125	48,50,55,56	76	155	97	160	10.4	0.0185	0.113		
			60,63,65									
JS7	1800	3600	55,56	89	181	115	190	17.7	0.0451	0.172		
			60,63,65,70,71,75									
			80									
JS8	3150		65,70,71,75	98	199	122	210	25.4	0.0787	0.254		
			80,85,90,95									
JS9	5600	2440	75	120	245	155	250	42.2	0.178	0.426		
			80,85,90,95									
			100,110									
JS10	8000	2250	85,90,95	127	259	162	270	54.4	0.27	0.508		
			100,110,120									
JS11	12500	2025	90,95	149	304	191	310	81.2	0.514	0.735		
			100,110,120,125									
			130,140									

JS12	18000	1800	110,120,125	162	330	195	346	6	121	0.98	0.907	
			130,140,(150)									
			160,170									
JS13	25000	1600	120,125	184	374	201	384		178	1.85	1.13	
			130,140,150									
			160,170,180									
			190,200									
JS14	35500	1500	140,150	183	372	271	450		391	227	3.49	1.95
			160,170,180									
			190,200									
JS15	50000	1300	160,170,180	198	402	278	500		431	309	5.82	2.81
			190,200,220									
			240									
JS16	63000	1200	180	216	438	307	566		487	448	10.4	3.49
			190,200,220									
			240,250,260									
			280									
JS17	90000	1100	200,220	239	484	321	630		555	619	18.3	3.76
			240,250,260									
			280,300									
JS18	125000	1000	240,250,260	260	526	325	675		608	776	26.1	4.4
			280,300,320									
JS19	160000	900	280,300,320	280	566	355	756		660	1057	43.5	5.62
			340,360									
JS20	224000	820	300,320	305	623	432	845	751	1424	75.5	10.53	
			340,360,380									
JS21	315000	730	320	325	663	490	920	822	1785	113	16.1	
			340,360,380									
			400,420									
JS22	400000	680	340,360,380	345	703	546	1000	905	2267	175	24.06	
			400,420,440,450									
JS23	500000	630	360,380	368	749	648	1087	-	2950	339	33.8	
			400,420,440,450,460,480									
JS24	630000	580	400,420,440,450,460	401	815	698	1180		3835	524	50.17	
JS25	800000	540	420,440,450,460,480,500	432	877	762	1260		4682	711	67.24	



JSB14型~JSB16型

1、5—半联轴器 2—润滑孔 3—罩壳 4—蛇形弹簧

型号	公称转矩 T_n /N.m	许用转速 $[n]$ /(r/min)	轴孔直径 d_1, d_2	L	L_0	L_2	L_3	D	间隙 t	质量 m /kg	润滑油 /kg	
JSB1	45	6000	18,19	47	97	48	24	112	3	1.95	0.027	
			20,22,24									
			25,28									
JSB2	140		22,24	47	97	48	25	122		2.59	0.041	
			25,28									
			30,32,35									
JSB3	224		25,28	50	103	51	26	130		3.36	0.054	
			30,32,35,38									
			40,42									
JSB4	400		32,35,38	60	123	61	31	149		5.44	0.068	
			40,42,45,48,50									
JSB5	630		6000	40,42,45,48,50,55,56	63	129	64	32		163	7.26	0.086
JSB6	900	5500	48,50,55,56	76	155	67	34	174	10.44	0.113		
			60,63,65									
JSB7	1800	4750	55,56	89	181	89	44	200	17.7	0.172		
			60,63,65,70,71,75									
			80									
JSB8	3150	4000	65,70,71,75	98	199	96	47	233	25.42	0.254		
			80,85,90,95									
JSB9	5600	3250	75	120	245	121	60	268	6	42.22	0.427	
			80,85,90,95							42.20	0.426	
			100,110									
JSB10	8000	3000	80,85,90,95	127	259	124	63	287	54.48	0.508		
			100,110,120									

JSB11	12500	2700	90,95	149	304	143	74	320		81.72	0.735
			100,110,120,125								
			130,140								
JSB12	18000	2400	110,120,125	162	330	146	75	379		122.58	0.908
			130,140,(150)								
			160,170								
JSB13	25000	2200	120,125	184	374	156	78	411	6	180.24	1.135
			130,140,150								
			160,170,180								
			190,200								
JSB14	35500	2200	140,150	183	372	204	107	476		230.18	1.952
			160,170,180								
			190,200								
JSB15	50000	1750	160,170,180	216	438	216	115	533	321.43	3.496	
			190,200,220								
			240								
JSB16	63000	1600	180		483	226	120	584	448.55	3.496	
			190,200,220								
			240,250,260								

www.tmc-flex.com

			160,170,180								
			190								
JSS13	25000	1600	120,125								
			130,140,150	152	267		384	386		340.50	1.135
			160,170,180								
			190,200								
JSS14	35500	1500	100,110,120,125								
			130,140,150	137	345	371	453	426		442.7	1.950
			160,170,180,								
			190,200,220								
			240,250,260								
JSS15	50000	1300	130,140,150								
			160,170,180	186	356	406	501	457		552.06	2.810
			190,200,220								
			240,250,260								
			280								
JSS16	63000	1200	125								
			130,140,150	220	384	444	566	527		836	3.490
			160,170,180								
			190,200,220								
			240,250,260								
			280,300,320								
JSS17	90000	1100	100,110,120,125						10		
			130,140,150	249	400	491	630	591		1099.58	3.770
			160,170,180								
			190,200,220								
			240,250,260								
			280,300,320								
JSS18	125000	1000	110,120,125								
			130,140,150	276	411	530	676	660		1479.59	4.400
			160,170,180								
			190,200,220								
			240,250,260								
			280,300,320								
			340,360								
JSS19	160000	900	280,300,32								
			130,140,150	305	444	575	757	711		1856.86	5.630
			160,170,180								
			190,200,220								
			240,250,260								
			280,300,320								
			340,360,380								